



Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA

Frequency Dividers Technical Data Sheet

PE88D8002

Features

- Wide Input Frequency Range: 100 MHz to 20 GHz
- Divide-by-8 Prescaler
- Output Frequency 12.5 MHz to 2.5 GHz
- Output Power: +4 dBm typical
- Low SSB Phase Noise: -153 dBc/Hz @ 100 KHz offset typical
- RoHS & REACH Compliant Assembly
- Bias Voltage: +5 Vdc
- Operational Temperature Range: -40°C to +85°C
- Compact SMA Connectorized Package
- Designed to meet MIL-STD-202 Test Conditions

Applications

- PLL Applications
- Test Instrumentation
- Countermeasures
- Point to Point Microwave Radio
- SATCOM
- MILCOM
- Base Stations

Description

The PE88D8002 is a coaxial packaged Frequency Divider module that operates across a wide input frequency range from 100 MHz to 20 GHz and supports a divide ratio of 8. Output Frequency is 12.5 MHz to 2.5 GHz. Impressive broadband typical performance of this Prescaler includes output power of +4 dBm, SSB phase noise of -153 dBc/Hz at 100 KHz offset. This exceptional technical performance is achieved through the use of a hybrid MIC PCB solder assembly which is RoHS and REACH compliant. This frequency divider design requires +5 Vdc typical bias voltage, operates over maximum temperature range of -40°C to +85°C and has an absolute maximum rating for input power of +13 dBm. The rugged and compact package supports SMA Female connectors, RFI and Ground Pins. For highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for Humidity, Shock, Vibration, and Altitude.

Electrical Specifications (TA= 25°C, Vd1 = 5 Vdc, Id1 = 175 mA)

Description	Minimum	Typical	Maximum	Units
Input Frequency (Sine Wave)	0.1		20	GHz
Output Frequency (Square Wave Output)	0.0125		2.5	GHz
Output Power	2	5		dBm
Phase Noise @100kHz Offset		-153		dBc/Hz
Operating DC Voltage 1		5		V
Operating DC Current 1		175		mA

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.1 to 0.25	0.25 to 1	1 to 10	10 to 18	18 to 20	GHz
Input Power (CW), Max	10	10	10	10	10	dBm
Input Power (CW), Min	5	-2	-16	-12	-9	dBm

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA PE88D8002](#)



Frequency Divider, Divide by 8 Prescaler
Module, 100 MHz to 20 GHz, SMA

Frequency Dividers Technical Data Sheet

PE88D8002

Mechanical Specifications

Size

Length	1.25 in [31.75 mm]
Width	1.25 in [31.75 mm]
Height	0.563 in [14.3 mm]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity

MIL-STD-202F, Method 103B, Condition B

Shock

MIL-STD-202F, Method 213B, Condition B

Vibration

MIL-STD-202F, Method 204D, Condition B

Altitude

MIL-STD-202F, Method 105C, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA PE88D8002](#)




Frequency Divider, Divide by 8 Prescaler
Module, 100 MHz to 20 GHz, SMA

Frequency Dividers Technical Data Sheet

PE88D8002

Typical Performance Data

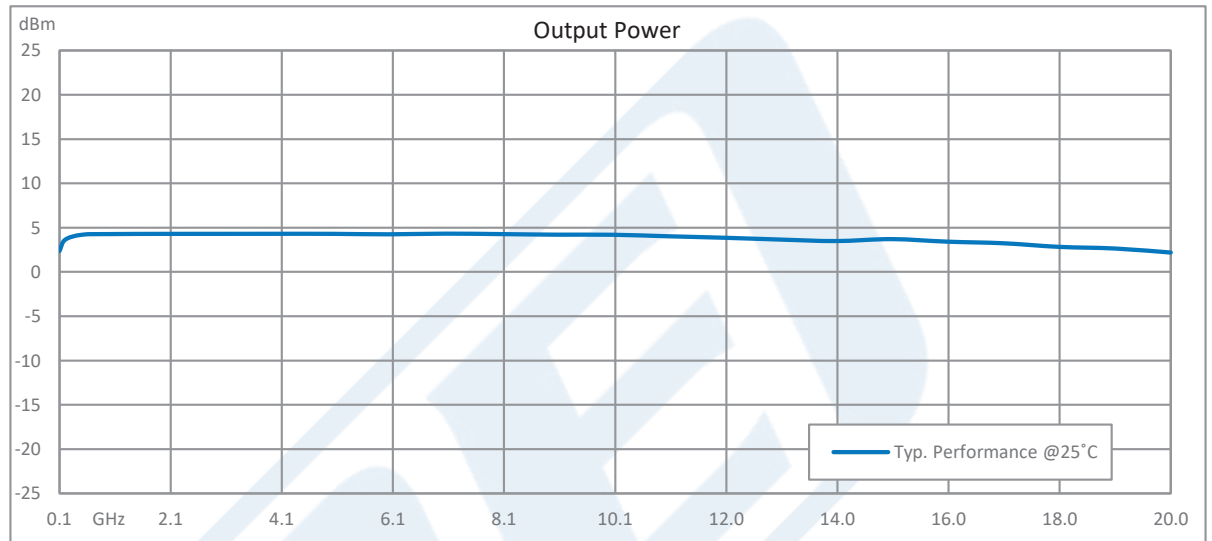

Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA PE88D8002](https://www.pasternack.com/frequency-divider-divide-8-prescaler-module-100-mhz-20-ghz-sma-pe88d8002-p.aspx)





URL: <https://www.pasternack.com/frequency-divider-divide-8-prescaler-module-100-mhz-20-ghz-sma-pe88d8002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE88D8002 CAD Drawing

Frequency Divider, Divide by 8 Prescaler Module, 100 MHz to 20 GHz, SMA

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/25/19	T. GALLA

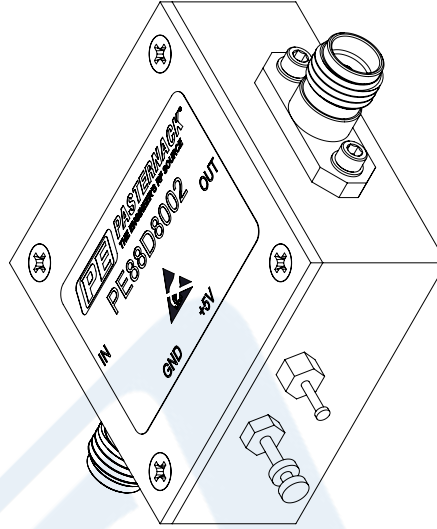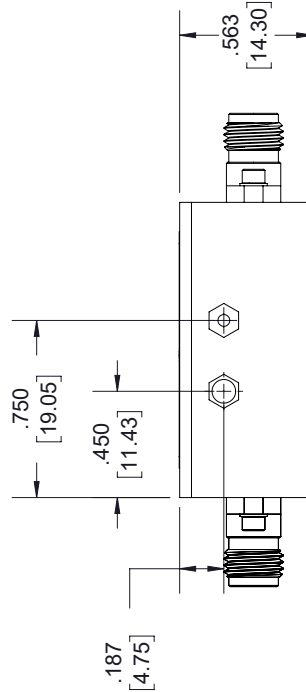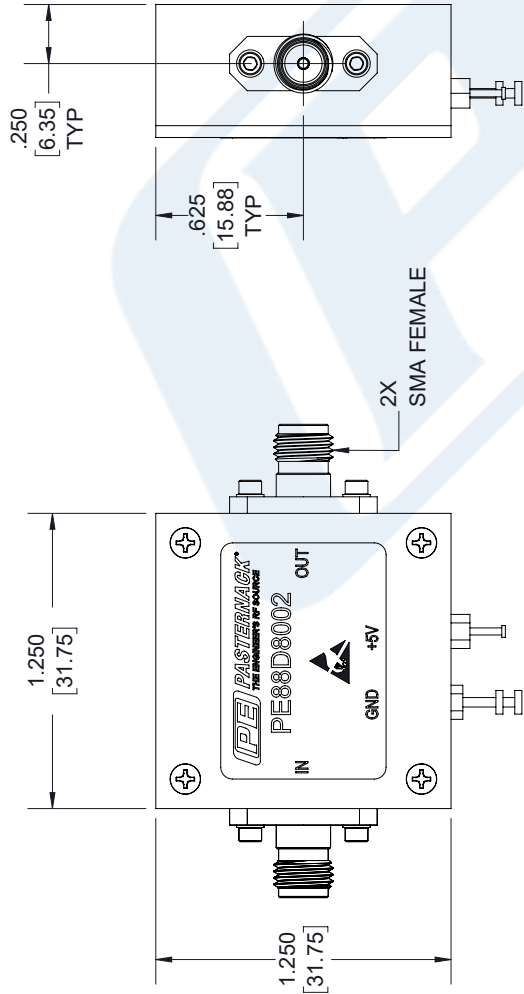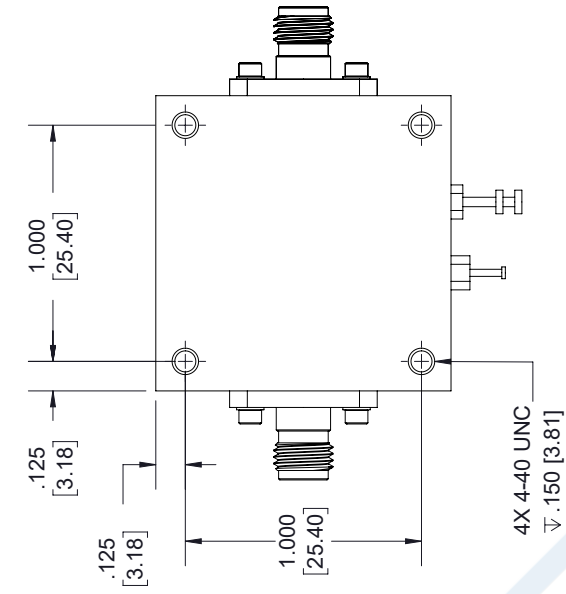

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
X \pm .2	[5.08]
.XX \pm .01	[.25]
.XXX \pm .005	[.13]
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	
THIRD-ANGLE PROJECTION	

 PASTERNAK an INFINITO brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1,949,261,1920 1,866,727,8376 Fax: 1,949,261,7451 www.pasternack.com e-mail: sales@pasternack.com		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A
SIZE A CAGE 53919 DRAWN BY K.DANG PART NUMBER PE88D8002 REV A		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.